



## Recommendations


Work material	Standard	High performance
Mild steel	A24-Q	FA24-Q
Stainless steel	A30-P	WA36-P
Cast Iron, Bronze	A24-Q	AC24-S
Masonry & Concrete	C20-Q	C20-S

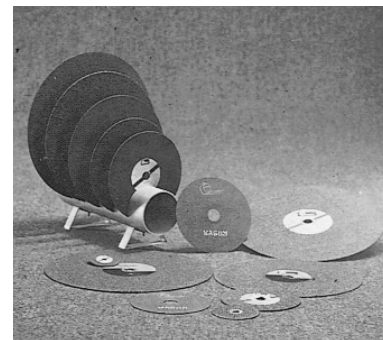

## Explanation of Specification (Example):

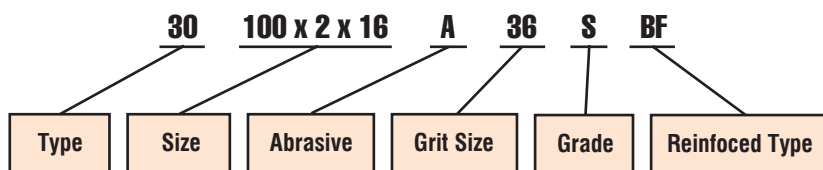

## Reinforced type:

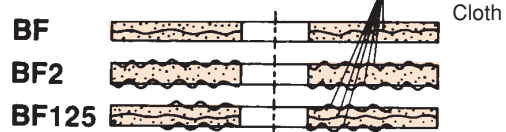

## For Metal-BF

Size	Specifications	Max. rpm	Products Code
100 x 2 x 16mm 4" x 5/64" x 5/8"	A36S-BF	13700	SA1156-
125 x 2 x 22.23mm 5" x 5/64" x 7/8"	A36S-BF	11000	
150 x 2 x 22.23mm 6" x 5/64" x 7/8"	A36S-BF	9100	
180 x 2 x 22.23mm 7" x 5/64" x 7/8"	A36S-BF	11000	
255 x 3 x 25.4mm 10" x 1/8" x 1"	AC36P-BF	7600	SA1420-
	A24Q-BF	4700	SA1530-
305 x 3 x 25.4mm 12" x 1/8" x 1"	A24Q-BF	4000	SA1630-
	A30P-BF	4000	SB1721-
355 x 3.5 x 25.4mm 14" x 1/8" x 1"	A24Q-BF	3400	SA1730-
	A30P-BF	3400	SB1721-
405 x 3.2 x 25.4mm 16" x 1/8" x 1"	A36Q-BF	3000	SA1831-
	AC24R-BF	3000	SJ1846-
405 x 3.5 x 25.4mm 16" x 1/8" x 1"	A24Q-BF	3000	SA1830-
	A30P-BF	3000	SB1820-
	AC24S-BF	3000	AJ1856-
	FA30S-BF	3000	SL1856-
	WA36P-BF	3000	SX1820-
405 x 4 x 25.4mm	FA24S-BF	3000	SA1861-
455 x 4 x 25.4mm	FA24S-BF	2700	
510 x 4 x 25.4mm	FA24Q-BF	2400	
585 x 4.5 x 30mm	FA24Q-BF	2050	

## For Masonry-BF

305 x 4 x 25.4mm 12" x 5/32" x 1"	C20Q-BF	4000	SC1630-
355 x 4 x 25.4mm 14" x 5/32" x 1"	C20Q-BF	3400	SC1730-
	C20S-BF	3400	SC1756-
405 x 4 x 25.4mm 16" x 5/32" x 1"	C20Q-BF	3000	SC1830-
	C20S-BF	3000	SC1856-

## For Metal-BF2

Size	Specifications	Max. rpm	Products Code
75 x 1.6 x 9.53mm 3" x 1/16" x 3/8"	A46S-BF2	25500	SA1056-
	FA60R-BF2	25500	
100 x 1.6 x 16mm 4" x 1/16" x 5/8"	A46S-BF2	15300	
	FA60R-BF2	15300	SA1146-
115 x 2.5 x 22.23mm 4-1/2" x 3/32" x 7/8"	A36S-BF2	13200	
125 x 2.5 x 22.23mm 5" x 3/32" x 7/8"	A36S-BF2	12200	
150 x 2.5 x 22.23mm 6" x 3/32" x 7/8"	A36S-BF2	10200	
180 x 3 x 22.23mm 7" x 1/8" x 7/8"	A24S-BF2	8500	
230 x 3 x 22.23mm 9" x 1/8" x 7/8"	A24S-BF2	6600	
255 x 3 x 25.4mm 10" x 1/8" x 1"	A24S-BF2	6000	
305 x 3.2 x 25.4mm 12" x 1/8" x 1"	A24S-BF2	5000	
355 x 3.5 x 25.4mm 124" x 1/8" x 1"	A24S-BF2	4300	
405 x 3.5 x 25.4mm 16" x 1/8" x 1"	A24S-BF2	3850	
455 x 4 x 25.4mm 18" x 5/32" x 1"	FA24R-BF2	3300	
510 x 4 x 25.4mm 20" x 5/32" x 1"	FA24R-BF2	3000	
585 x 4.5 x 30mm 23" x 5/32" x 1-3/16"	FA24R-BF2	2600	
610 x 5 x 44.45mm 24" x 3/16" x 1-3/4"	FA24R-BF2	2260	